



High Performance in reaching and crossing

# ACROSS HP™

RX

- Very low compliance
- Balanced performance
- Tapered tip for superior crossability
- Low crossing profile
- Outstanding material strength




Double marker

Seamless Tip-to-shoulder

High RBP up to 20 Atm

Low entry profile 0.017"

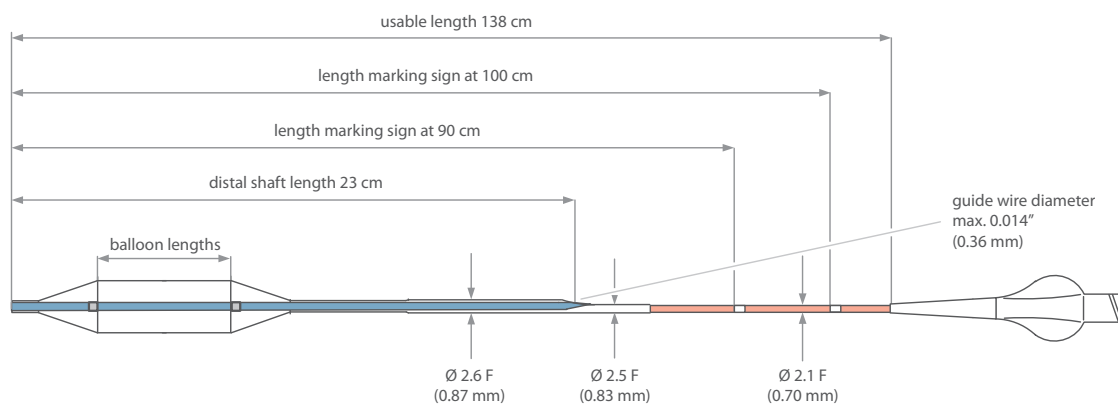

## Ordering Information / Technical Information

Reference	Balloon Diameter	Balloon Length	Marker	Tip Length	Entry Profile	Max. Guidewire	Usable Length	Min. Guide Catheter / ID
150100350	1.5 mm	10 mm	2	4 mm	0.017"	0.014"	138 cm	5 F / 0.056"
150150350	1.5 mm	15 mm	2	4 mm	0.017"	0.014"	138 cm	5 F / 0.056"
150200350	1.5 mm	20 mm	2	4 mm	0.017"	0.014"	138 cm	5 F / 0.056"
200100350	2.0 mm	10 mm	2	4 mm	0.017"	0.014"	138 cm	5 F / 0.056"
200150350	2.0 mm	15 mm	2	4 mm	0.017"	0.014"	138 cm	5 F / 0.056"
200200350	2.0 mm	20 mm	2	4 mm	0.017"	0.014"	138 cm	5 F / 0.056"
250100350	2.5 mm	10 mm	2	4 mm	0.017"	0.014"	138 cm	5 F / 0.056"
250150350	2.5 mm	15 mm	2	4 mm	0.017"	0.014"	138 cm	5 F / 0.056"
250200350	2.5 mm	20 mm	2	4 mm	0.017"	0.014"	138 cm	5 F / 0.056"
300100350	3.0 mm	10 mm	2	4 mm	0.017"	0.014"	138 cm	5 F / 0.056"
300150350	3.0 mm	15 mm	2	4 mm	0.017"	0.014"	138 cm	5 F / 0.056"
300200350	3.0 mm	20 mm	2	4 mm	0.017"	0.014"	138 cm	5 F / 0.056"
350100350	3.5 mm	10 mm	2	2 mm	0.017"	0.014"	138 cm	5 F / 0.056"
350150350	3.5 mm	15 mm	2	2 mm	0.017"	0.014"	138 cm	5 F / 0.056"
350200350	3.5 mm	20 mm	2	2 mm	0.017"	0.014"	138 cm	5 F / 0.056"
400100350	4.0 mm	10 mm	2	2 mm	0.017"	0.014"	138 cm	5 F / 0.056"
400150350	4.0 mm	15 mm	2	2 mm	0.017"	0.014"	138 cm	5 F / 0.056"
400200350	4.0 mm	20 mm	2	2 mm	0.017"	0.014"	138 cm	5 F / 0.056"
450100350	4.5 mm	10 mm	2	2 mm	0.017"	0.014"	138 cm	5 F / 0.056"
450150350	4.5 mm	15 mm	2	2 mm	0.017"	0.014"	138 cm	5 F / 0.056"
450200350	4.5 mm	20 mm	2	2 mm	0.017"	0.014"	138 cm	5 F / 0.056"

## Control your Size



The balloon material is a semi-compliant polyamide, providing a 'Work Your Size'.

Balloon	Atm	Atm	Atm	Atm*	Atm	Atm	Atm**	Atm**	Atm**	Atm**	Atm	Atm
∅	5	7	9	11	13	15	17	18	19	20	21	22
1.5 mm	1.40 mm	1.43 mm	1.47 mm	<b>1.50 mm</b>	1.55 mm	1.60 mm	1.65 mm	1.67 mm	1.69 mm	<b>1.71 mm</b>	1.73 mm	1.75 mm
2.0 mm	1.82 mm	1.88 mm	1.94 mm	<b>2.00 mm</b>	2.07 mm	2.13 mm	2.18 mm	2.20 mm	2.22 mm	<b>2.24 mm</b>	2.25 mm	2.29 mm
2.5 mm	2.28 mm	2.34 mm	2.43 mm	<b>2.50 mm</b>	2.57 mm	2.65 mm	2.71 mm	2.74 mm	2.76 mm	<b>2.78 mm</b>	2.79 mm	2.81 mm
3.0 mm	2.65 mm	2.76 mm	2.88 mm	<b>3.00 mm</b>	3.10 mm	3.18 mm	3.24 mm	3.27 mm	<b>3.30 mm</b>	3.33 mm	3.35 mm	
3.5 mm	3.19 mm	3.31 mm	3.44 mm	<b>3.50 mm</b>	3.56 mm	3.62 mm	3.69 mm	<b>3.74 mm</b>	3.79 mm	3.83 mm		
4.0 mm	3.63 mm	3.71 mm	3.85 mm	<b>4.00 mm</b>	4.09 mm	4.18 mm	4.24 mm	<b>4.28 mm</b>	4.31 mm	4.34 mm		
4.5 mm	3.98 mm	4.15 mm	4.32 mm	<b>4.50 mm</b>	4.66 mm	4.77 mm	<b>4.87 mm</b>	4.91 mm	4.95 mm			

**Atm\*** Nominal Pressure (NP)

**Atm\*\*** Rated Burst Pressure (RBP)

High Performance in reaching and crossing

